

# ET BLACK MODULE

## Monocrystalline

- ET-M672310BB 310W
- ET-M672305BB 305W
- ET-M672300BB 300W
- ET-M672295BB 295W



High conversion efficiency  
High module efficiency to guarantee power output.



Self-cleaning glass  
Coating glass for self-cleaning, reduce surface dust.



Outstanding low irradiation performance  
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.




Excellent loading capability  
2400Pa wind loads, 5400Pa snow loads.

0 to +5W

0 to +5W positive tolerance  
Detailed information in Electrical Specifications.

48

48-hour response service

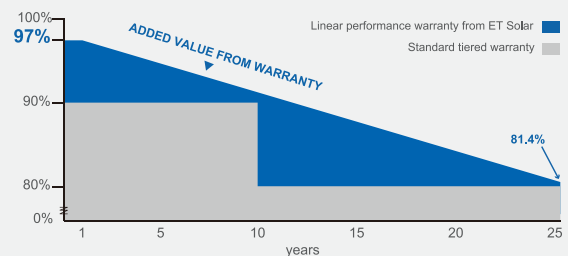

25

25-year performance warranty

10

10-year warranty on materials and workmanship

IEC 61215 Ed.2  
IEC 61730



Towards Excellence

M/ET-CP-EN-EU2014V3

[www.etsolar.com](http://www.etsolar.com)

## ELECTRICAL SPECIFICATIONS

Model Type	ET-M672310BB	ET-M672305BB	ET-M672300BB	ET-M672295BB
Peak Power (Pmax)	310W	305W	300W	295W
Module Efficiency	15.98%	15.72%	15.46%	15.20%
Maximum Power Voltage (Vmp)	37.26V	36.75V	36.24V	35.78V
Maximum Power Current (Imp)	8.32A	8.30A	8.28A	8.25A
Open Circuit Voltage (Voc)	45.40V	45.12V	44.92V	44.80V
Short Circuit Current (Isc)	8.95A	8.88A	8.81A	8.72A
Power Tolerance	0 to +5W			
Maximum System Voltage	DC 1000V			
Nominal Operating Cell Temperature	44.4±2°C			
Fire Safety	Class C			
Maximum Series Fuse Rating	20A			

## MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	72 cells in series
Weight	26.3 kg (57.98 lbs)
Dimension	1956×992×40mm (77.01×39.06×1.58 inch)
Max Load	5400 Pascals ( 112 lb/ft <sup>2</sup> )
Junction Box	IP67 rated
Connector	MC4 Compatible


## TEMPERATURE COEFFICIENT

Temp. Coeff. of Isc (TK Isc)	0.02% /°C
Temp. Coeff. of Voc (TK Voc)	-0.31% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

## PACKING MANNER


Container	40' HQ
Pieces per Pallet	26
Pieces per Container	572

## PHYSICAL CHARACTERISTICS Unit:mm (inch)

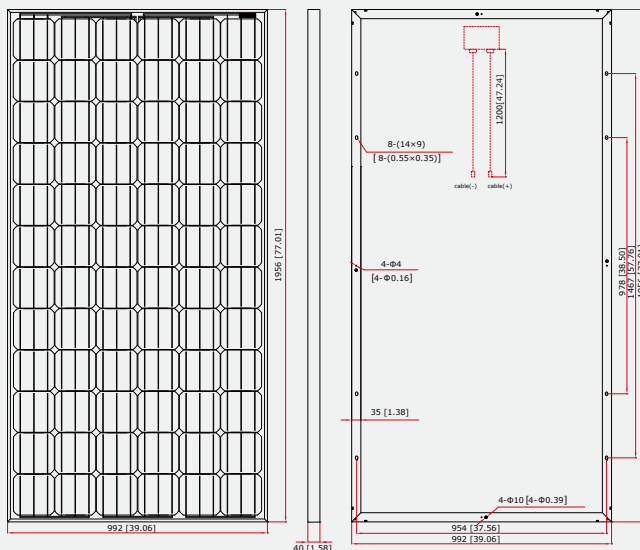


## ELECTRICAL CHARACTERISTICS


Current-Voltage & Power-Voltage Curve  
(AM1.5, Cell Temperature 25°C)

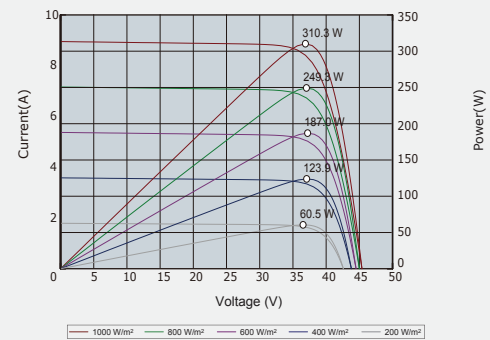

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax  
(AM1.5, Cell Temperature 25°C)



**Note:** the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m<sup>2</sup>, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact [support@etsolar.com](mailto:support@etsolar.com) for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.