


Polycrystalline Solar Module

We are pleased to introduce the state-of-the-art LG photovoltaic module with 25 years of in-depth R&D and more than half century of consumer electronics technology and services. LG photovoltaic module is perfect for on-grid general applications, such as residential, commercial, or utilities. With reliable materials, unique design, and systematic quality assurance, we promise our customers to provide with unmatched product values and services. Let LG's electronics experience support your business with proven reliability.



LG Cell Technology

With 25 years of devoted and thorough R&D, LG has successfully developed the Solar Cell both state-of-the-art and credible.




Plus-only Power Tolerance

LG delivers its every product with world's strict and systematic product assurance. Nominal power tolerance starts from 0%.



Superior Durability

Withstanding the maximum load of 5400Pa, it still is very light in weight with slim glass and very solid in module sustainability.



Reliable Materials

LG only selects the world's most reliable suppliers who produce materials proven to be the best quality in the industry.



Unique Frame Design

LG photovoltaic module is uniquely designed to drain liquid even when installed in any slopes and angles. The frames are designed for easy grip.



Unmatched Warranty & Services

LG has the industry leading support policies. 5 year product warranty, 12 year 90% power warranty, and 25 year 80% power warranty.

LG Polycrystalline Module

LG230P1W | LG225P1W | LG220P1W


Mechanical Properties

Cells	6 × 10
Cell vendor	LG
Cell Type	Polycrystalline
Cell dimensions	156 × 156 mm ² / 6 × 6 in ²
# of Busbar	3
Dimensions (L×W×H)	1649 × 993 × 42 mm 65 × 39 × 2 in
Maximum load (Pa)	5,400
Weight	19.5 kg / 43 lb
Connector type	Yukita
Bypass diode	3
Length of cables	2 × 1,000 mm / 2 × 39 in

Certification & Warranty

Certification	IEC61215 Ed.2, IEC61730, TUV
Product Warranty	5 years
Output warranty of P _{MIN}	12/90 years/%
Output warranty of P _{MIN}	25/80 years/%

Dimension (in millimeters)

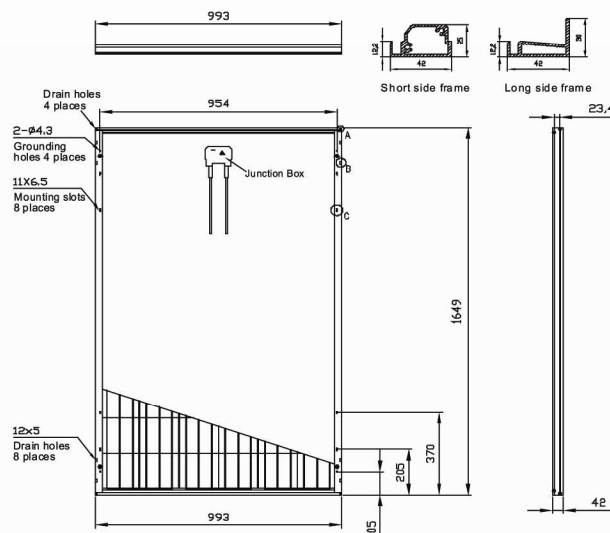

Electrical Properties (STC*)



Max. output (P _{MAX})	230Wp	225Wp	220Wp	Temperature coefficient (P _{MPP})	-0.45%/K
Performance tolerance	0~+3%	0~+3%	0~+3%	Temperature coefficient (V _{MPP})	-0.12V/K
Module efficiency	14.0%	13.7%	13.4%	Temperature coefficient (V _{MPP})	-0.33%/K
MPP voltage (V _{MPP})	29.1V	29.0V	28.9V	Temperature coefficient (I _{MPP})	4.68mA/K
MPP Current (I _{MPP})	7.91A	7.76A	7.62A	Temperature coefficient (I _{MPP})	0.05%/K
Open-circuit voltage (V _{OC})	36.4V	36.3V	36.1V	Maximum system voltage	1,000V
Short-circuit current (I _{SC})	8.39A	8.30A	8.21A	Series fuse rating (A)	15A

*The electrical properties applies under Standard Test Conditions (STC) with 1,000 W/m² irradiation, 25°C cell temperature, and AM1.5 spectrum.

The rated electrical characteristics are subject to a manufacturing tolerance of 0%~3%.

*The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Characteristic Curves

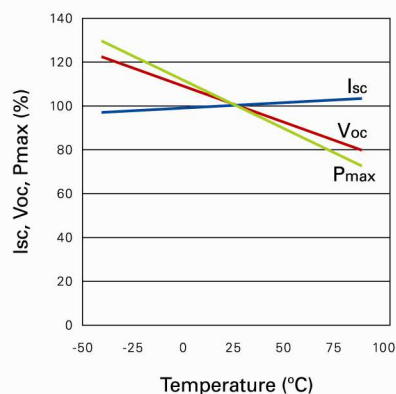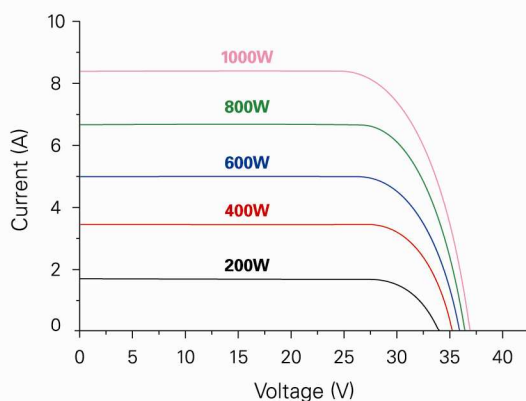

LG

LG Electronics Deutschland GmbH
Jakob-Kaiser-Strasse 12, 47877 Willich, Germany
Contact : solarinfo@lge.com
<http://www.lg-solar.com>

Product specifications are subject to change without notice.

LG, LG logo, and Life's Good are trademarks of LG Electronics, Inc. worldwide. Trademarks and intellectual properties of LG Electronics, Inc. are protected by international copyright laws.