

SOLARWATT M250-60 AC

Monocrystalline solar cells, 230 Wp - 255 Wp, Aluminium frame

ENGLISH

SOLARWATT PROMISE

Quality

Tested materials and thorough workmanship guarantee high yields and system longevity.

Made in Germany

SOLARWATT solar modules are exclusively produced in Germany.

Positive classification range (+0 Wp to +5 Wp)

The actual module output is guaranteed to be up to 5 Wp above the nominal value.

Optimum mechanical stability

4mm structured solar glass and 50mm frame ensure stability and torsional strength.

SOLARWATT WARRANTY


Standard warranty

10 year product warranty
staggered performance warranty covering 25 years

Extended warranty by purchasing SOLARWATT Full Coverage insurance

12 year product warranty
linear performance warranty covering 25 years

According to the „Special warranty conditions for SOLARWATT solar modules“

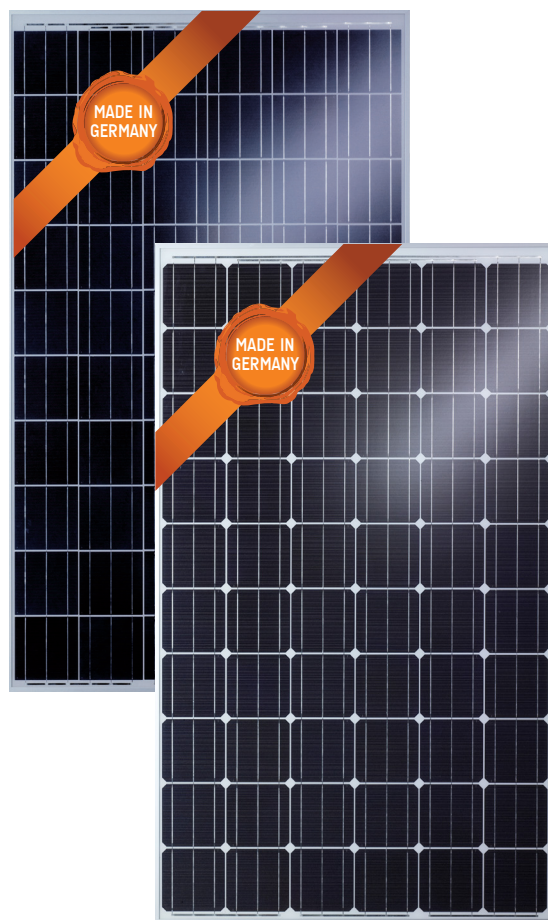

SOLARWATT ADVANTAGES

- ▶ Clear identification provided by serial number engraved on front of frame
- ▶ Waste is prevented thanks to the patented, resource-saving QUICKSTAXX® packaging system
- ▶ Independent tests confirm resistance to hail, ammonia, flame, and more*
- ▶ Take-back service and module recycling



* For further information visit us on www.solarwatt.de



SOLARWATT AG
Maria-Reiche-Str. 2a
01109 Dresden, Germany
Tel. +49 351 8895-0
Fax +49 351 8895-111
info@solarwatt.de
www.solarwatt.de

Certified acc. to:
DIN EN ISO 9001 und 14001




SOLARWATT M250-60 AC

Technical Data

Subject to change without notice.

DIMENSIONS

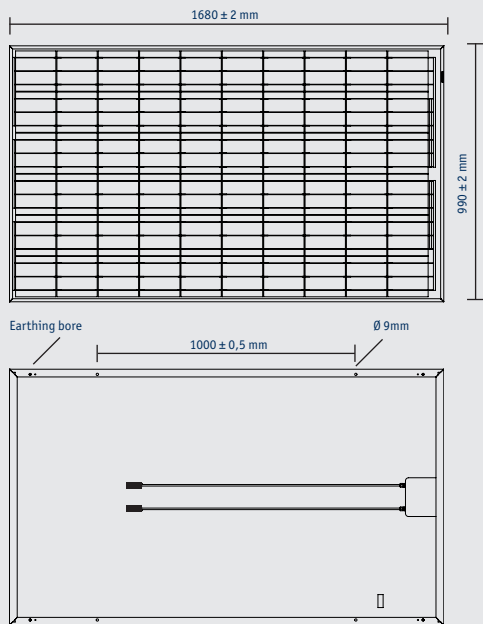

GENERAL DATA

Module technology	Glas-foil-laminate; aluminium frame
Cover material	High transparent solar glass (tempered), 4 mm
Encapsulation	EVA-solar cells-EVA
Back material	Multi-layer polymer sheet, white
No. and type of cells	60 monocrystalline solar cells
Dimensions of cells	156 x 156 mm
Cables and connectors	Cables 2x1,00 m/4 mm ² , Lumberg LC4 connectors
Bypass-diodes	3
Application class	Application class A (nach IEC 61730)
Dimensions (LxWxH)	1680 x 990 x 50 mm
Weight	24 kg
Max. system voltage	1000 V (US 600 VDC)
Mechanical Ratings	Suction pressure of 2400 Pa approved (Wind speed 130 km/h with safety factor 3) Load of 6000 Pa approved acc. to IEC 61215 Ed.2
Qualifications	IEC 61215 Ed.2, IEC 61730 (incl. Safety class II)

ELECTRICAL DATA (STC)

STC: Standard Test Conditions: measurement conditions: Radiation strength 1000 W/m², spectral distribution AM 1.5, temperature 25 °C, in accordance with EN 60904-3

Nominal power P _N	230 Wp	235 Wp	240 Wp	245 Wp	250 Wp	255 Wp
Nominal voltage U _{mpp}	28,4 V	28,5 V	28,7 V	29,0 V	29,2 V	29,4 V
Nominal current I _{mpp}	8,10 A	8,25 A	8,37 A	8,45 A	8,57 A	8,68 A
Open circuit voltage U _{oc}	36,2 V	36,4 V	36,5 V	36,7 V	36,8 V	36,9 V
Short circuit current I _{sc}	8,89 A	8,91 A	8,93 A	8,98 A	9,00 A	9,02 A

IR* 20 A

Measuring tolerances P_{max} ±5%;
* Reverse current power rating: Operation of the modules with an external power source is only permitted with a string fuse with a release current of < 20 A.

Reduction in the module efficiency with reduction in radiation strength of 1000 W/m² to 200 W/m² (25°C): 4±2% (relative) / -0,6±0,3% (absolute).


ELECTRICAL DATA (NOCT)

NOCT: Normal Operation Cell Temperature, measurement conditions: Radiation strength 800 W/m², AM 1.5, temperature 20 °C, wind speed 1m/s, electrical open-circuit operation

Nominal Power P _N	167 W	171 W	175 W	178 W	182 W	186 W
Nominal voltage U _{mpp}	25,7 V	25,8 V	26,0 V	26,3 V	26,5 V	26,9 V
Open circuit voltage U _{oc}	33,5 V	33,7 V	33,8 V	34,0 V	34,1 V	34,4 V
Short circuit current I _{sc}	7,17 A	7,19 A	7,20 A	7,24 A	7,26 A	7,27 A

CHARACTERISTIC LINES

Voltage charact. lines at different irradiances and temperatures

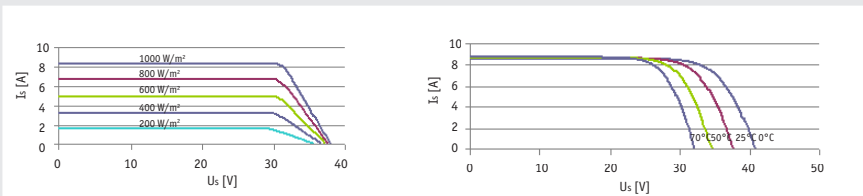

performance class 255 Wp

THERMAL FEATURES

Operating Temperature Range	-40 ... +80 °C
Ambiente Temperature Range	-40 ... +45 °C
Temperature Coefficient of P _N	-0,45%/K
Temperature Coefficient of U _{oc}	-0,36%/K
Temperature Coefficient of I _{sc}	0,03%/K
NOCT	45°C